



Blending the elegant dimming of an adaptive phase dimmer with the flexibility of a configurable keypad, the **QoraLux 6-Button Keypad Dimmer** transforms your standard light switch into a custom, in-wall control hub for virtually any network-based device.

## KEY BENEFITS

- Integrated remote and manual control for lighting, audio, video, HVAC, and more without the need for additional lighting control solutions
- Optimized for new construction or retrofits, 120 V, 240 V, or 277 V applications
- High fidelity and flicker-free dimming curves
- Fixture dimming profiles backed by rigorous compatibility testing
- Rapid provisioning for quick integration
- Seven programmable RGB LED status indicators for real-time execution feedback
- Decora-style with convenient screw terminals, designed for easy installation in standard gang boxes
- Support adds on 3-way control
- Sleek, screwless face plates (sold separately)

## SPECIFICATIONS

Control, Monitoring, and Network	
Network connectivity	Wi-Fi and Bluetooth
Provisional application requirements	Android 5.0 or higher, iOS 10 or higher
Standards and protocols	Secured Wi-Fi Network (2.4 G Only) IEEE 802.11 b/g/n
Supported operating systems	SAVI 3.4.1 and Higher
Wireless type	2.4 GHz, 1T1R

Electrical	
Max rating	550 W Incandescent@120/277 V 300 W CFL, LED@120/277 V 300 W ELV, MLV@120 V 200 W ELV, MLV@277 V

**Electrical**

Max inrush current	7 A
Minimum rating	4 W LED
Power input	120 VAC/60 Hz, 277 VAC/60 Hz

**Mechanical/Environmental**

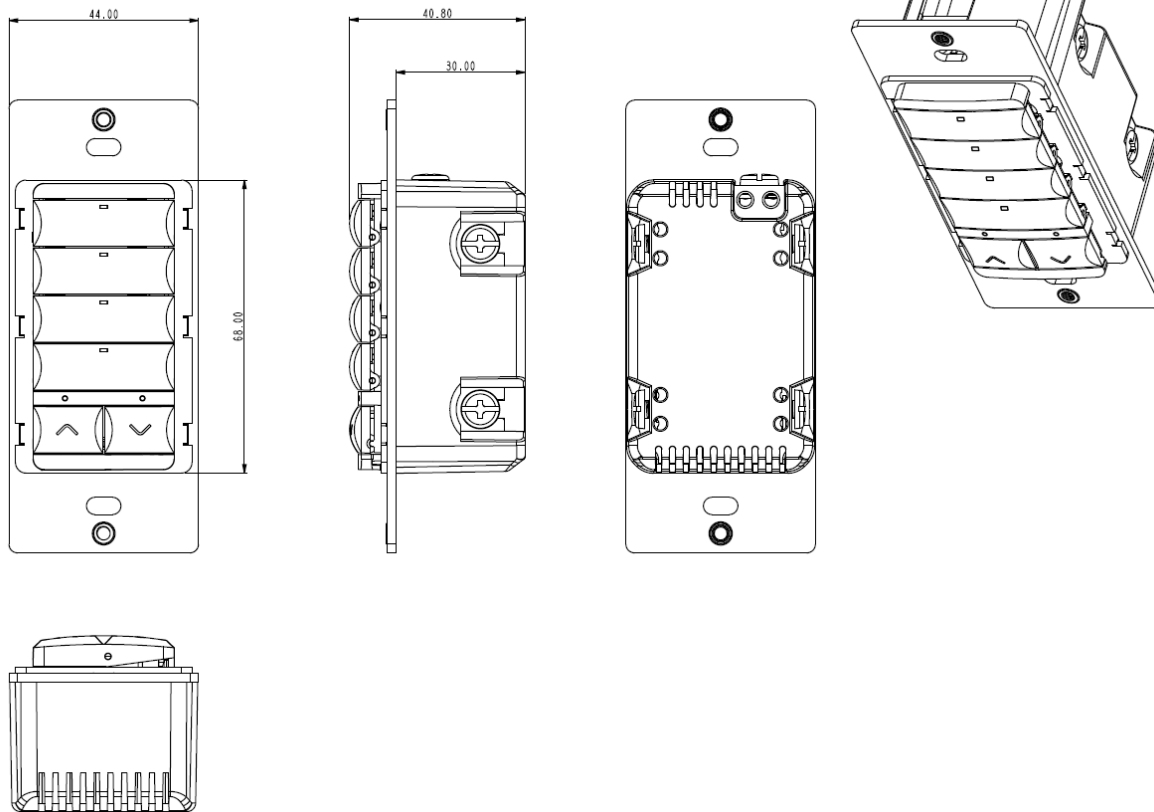
Dimensions	4.125 in x 1.5 in x 1.25 in (HxWxD)
Operating temperature	32 to 104 °F (0 to 40 °C)
Weight	0.16 lb

**Installation**

Mounting	1-gang mountable in a 3-1/2 in deep electrical box
Wall plates	1-gang wall plate: QWP1G-01-WH 2-gang wall plate: QWP2G-01-WH

**Compatible Products**

Companion Switch	QCS-01
------------------	--------

**LEGAL**

Input: 120/277 VAC 60 Hz

550W Incandescent@120/277 V, Dimmable 300 W CFL, LED@120/277 V

300W ELV, MLV@120 V

200W ELV, MLV@277 V

Operating ambient temperature 0 to 40 °C

Method of mounting included: Independently mounted (vertical position only)

Operating control, Type 1.B Action Pollution Degree 2

Rated Impulse Voltage 4000 V Software Class A

NEMA type 1 enclosure

FOR INDOOR USE ONLY