



The **QoraLux Quad Output Driver** is an all-in-one solution for intelligent power distribution featuring four outputs that power and control multiple fixtures simultaneously.

## KEY BENEFITS

- Seamless integration with SAVI Creator for configuration and stats
- Includes built-in power supply with standard NEC power plug and dimmable Class 2 outputs for simplified wiring
- Each output is individually configurable and addressable on any preferred channel, boasting 384 W max power capacity and 96 W per output
- Perfect for modern offices and conference spaces offering advanced zone control to manage multiple fixture groups
- Sleek, 1U design allows for rack or wall mounting
- Compounded energy-efficient savings with low-voltage power distribution
- Compatible with all QoraLux fixtures
- Module override button allows toggling with all channels ON through sensor input

## SPECIFICATIONS

Control, Monitoring, and Network	
DMX modes	5 modes: <ul style="list-style-type: none"> <li>• 1 channel mode: dimmer</li> <li>• 2 channel mode: warm white, cool white</li> <li>• 3 channel mode: R, G, B</li> <li>• 4 channel mode: R, G, B, W</li> <li>• 7 channel mode: dimmer R, G, B, W, strobe, macro</li> </ul>
Operating mode	22 pre-programs, standalone via display
Standards and protocols	DMX 512
Electrical	
Connection	NEMA 5-15 panel receptacle
Drive method	Constant voltage
Fuse	F5AL 250 V (5 x 20 mm)
Power input	110-240 VAC 5.9 A 50/60 Hz

**Electrical**

Sensor bypass	12 V, drives all 512 channels to full when contact closure is present (emergency lighting applications)
Total max power	384 W

**Outputs**

Connector type	5-pin screw terminal and RJ45 output
Outputs	4 ports, dimmable
Output voltage	0–24 VDC
Power per output	96 W

**Mechanical/Environmental**

Cooling	Silent, convection cooled
Dimensions	19 in x 10.37 in x 1.75 in (HxWxD)
DMX Connection	5-pin XLR and RJ45 in and out, optional 3-pin available (5-pin XLR is not class 2 and may require conduit)
Fastening system	1 RU fixed rack-mount ears
IP rating	Indoor use only
Operating temperature	24 to 148 °F (-4 to 64 °C)
Weight	8.4 lb

**Included Accessories**


Connectors	5-pin screw terminal blocks (4) 2-pin screw terminal block Rear and wall support rack ears (2)
------------	--

**Compatible Products\***

Accent 4"	QA4-10-01
Cove Strip	QCS-18-01
Flex Strip Horizontal	QFSH-94-01
Flex Strip Vertical	QFSV-94-01
Flex Strip Vertical Stealth	QFVS-94-01

Compatible Products*	
QORALUX.One Pro	QLCP-01
Mini 3"	QM3-9-01
Pendant 15"	QP15-96-01
Pathway 4"	QP4-30-01
Pendant 6"	QP6-20-01
Recessed 4"	QR4-10-01
Recessed 6"	QR6-19-01
Recessed 8"	QR8-30-01
Sconce 4"	QS4-20-01

\*Visit the [SAVI store](https://www.savicontrols.com) to view all of SAVI's branded products.

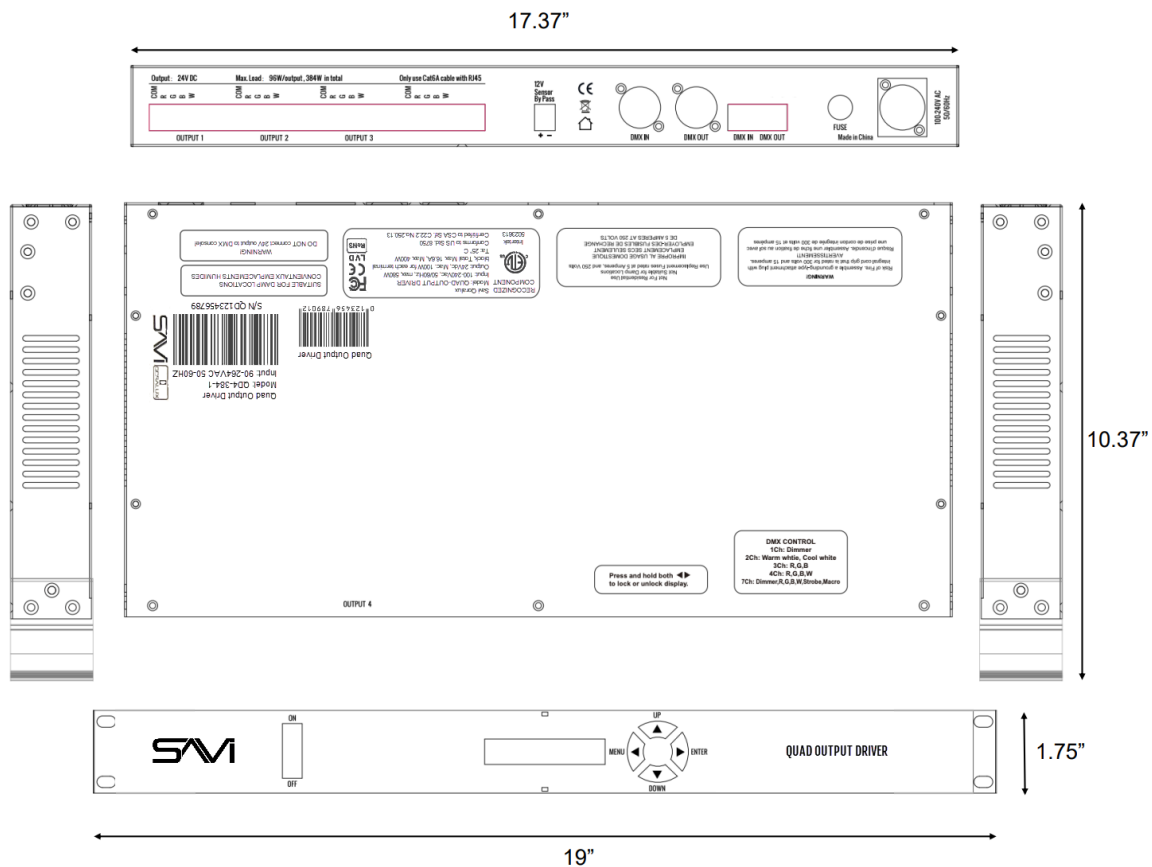

CONNECTIONS EXAMPLE

