



The **QoraLux Single Output Driver** is an all-in-one solution for intelligent power distribution featuring an output that powers and controls multiple fixtures simultaneously while saving space.

KEY BENEFITS

- Seamless integration with SAVI Creator for configuration and stats
- Includes built-in power supply with standard NEC power plug and dimmable Class 2 outputs for simplified wiring
- Individually configurable and addressable on any preferred channel, boasting a maximum of 96 W max power capacity
- Dynamic solution perfect for retrofit applications, decorative lighting, and demo kits
- Compact and flexible mounting with a teardrop wall mount
- Compounded energy-efficient savings with low-voltage power distribution
- Compatible with all QoraLux fixtures

SPECIFICATIONS

Control, Monitoring, and Network	
DMX modes	5 modes: <ul style="list-style-type: none"> • 1 channel mode: dimmer • 2 channel mode: warm white, cool white • 3 channel mode: R, G, B • 4 channel mode: R, G, B, W • 7 channel mode dimmer, R, G, B, W, strobe, macro
Operating mode	21 pre-programs, standalone via display
Standards and protocols	DMX 512

Electrical	
Connection	NEMA 5-15 panel receptacle
Drive method	Constant voltage
Fuse	F2AL 250 V (5 x 20 mm)
Power input	110–120 VAC
Sensor bypass	12 V, drives all 512 channels to full when contact closure is present (emergency lighting applications)

Electrical

Total max power	96 W
-----------------	------

Outputs

Connector type	5-pin screw terminal and RJ45 output
Outputs	1 port
Output voltage	0–24 VDC
Power per output	96 W

Mechanical/Environmental

Dimensions	11.94 in x 5.875 in x 2.125 in (HxWxD)
DMX Connection	5-pin XLR and RJ45 in and out (5-pin XLR is not class 2 and may require conduit)
Fastening system	Tear-drop wall mount
IP rating	Indoor use only
Operating temperature	24 to 148 °F (-4 to 64 °C)
Weight	3.75 lb

Included Accessories


Connectors	5-pin screw terminal block 2-pin screw terminal block
------------	--

Compatible Products*

Accent 4"	QA4-10-01
Cove Strip	QCS-18-01
Flex Strip Horizontal	QFSH-94-01
Flex Strip Vertical	QFSV-94-01
Flex Strip Vertical Stealth	QFVS-94-01
QORALUX.One Pro	QLCP-01
Mini 3"	QM3-9-01
Pendant 15"	QP15-96-01
Pathway 4"	QP4-30-01

Compatible Products*	
Pendant 6"	QP6-20-01
Recessed 4"	QR4-10-01
Recessed 6"	QR6-19-01
Recessed 8"	QR8-30-01
Sconce 4"	QS4-20-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

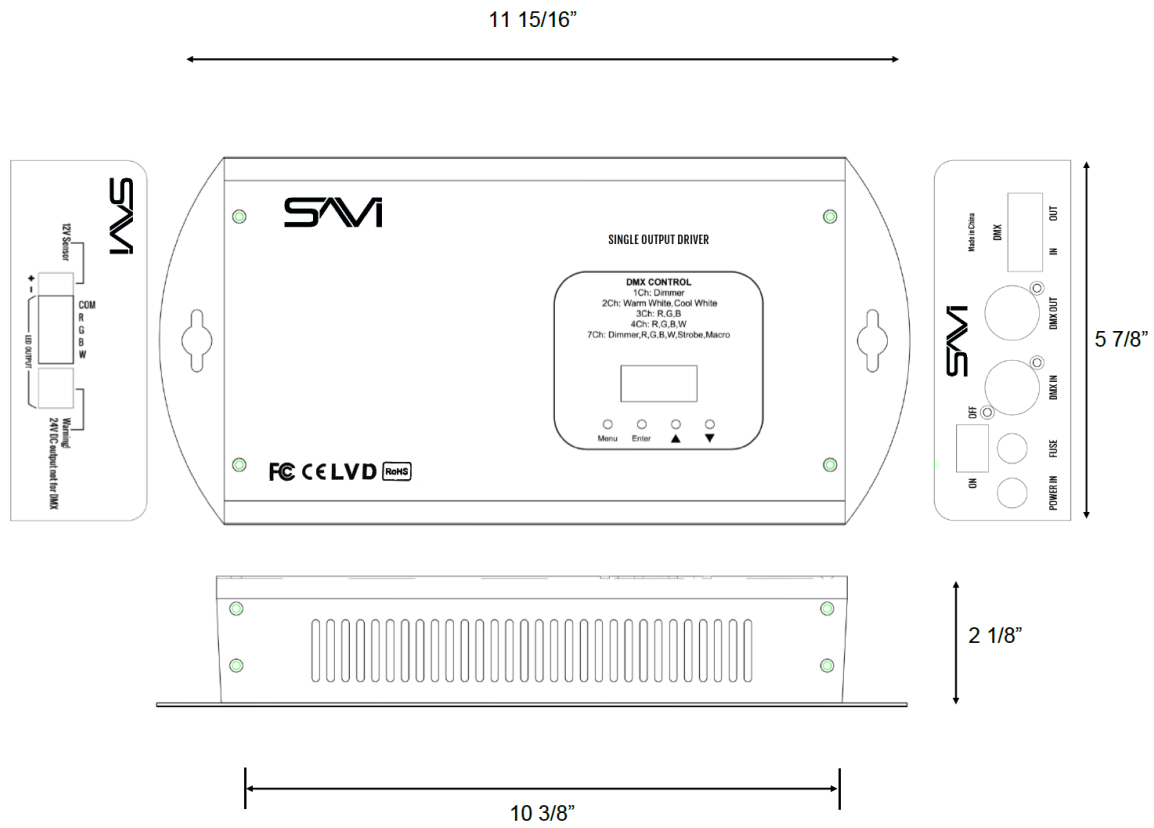

CONNECTIONS EXAMPLE

