



Providing convenient on/off controls for various load types, the **QoraLux Smart Switch** delivers wireless control for non-dimmable fixtures and groups of devices.

## KEY BENEFITS

- Integrated remote and manual control for outlets and non-dimmable LEDs, incandescent, halogen, electronic, magnetic low voltage transformers, and fluorescents
- Optimized for new construction or retrofits, 120 V or 277 V applications
- Rapid provisioning for quick integration
- Programmable RGB LED status indicator for real-time execution feedback
- Decora-style with convenient screw terminals, designed for easy installation in standard gang boxes
- Support add-on 3-way control
- Sleek, screwless face plates (sold separately)

## SPECIFICATIONS

Control, Monitoring, and Network	
Network connectivity	Wi-Fi and Bluetooth
Provisional application requirements	Android 5.0 or higher, iOS 10 or higher
Standards and protocols	Secured Wi-Fi network (2.4 G only) IEEE 802.11 b/g/n
Supported operating systems	SAVI 3.4.1 and higher
Wireless type	2.4 GHz, 1T1R

Electrical	
Max incandescent rating	960 W @ 120 V/1385 W (277 VAC)
Max inrush current	500 mA
Max motor rating	1/2 HP (120 VAC)/1/2 HP (277 VAC)
Max resistive rating	15 A @ 120/277 V
Power input	120 VAC/60 Hz, 277 VAC/60 Hz

**Mechanical/Environmental**

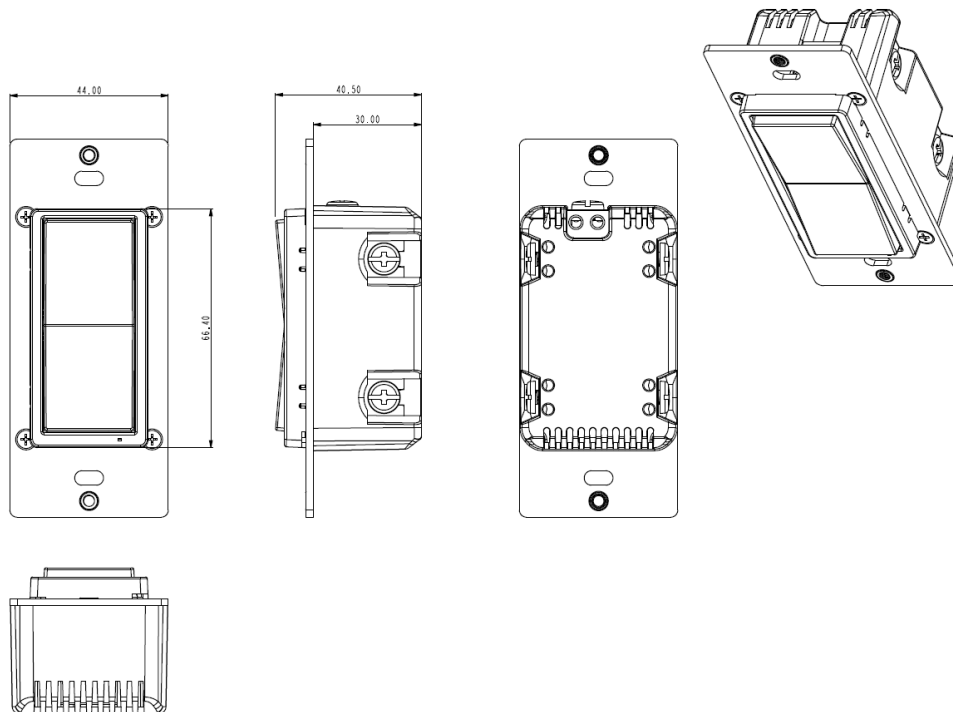
Dimensions	4.125 in x 1.5 in x 1.25 in (HxWxD)
Operating temperature	32 to 104 °F (0 to 40 °C)
Weight	0.16 lb

**Installation**

Mounting	1-gang mountable in a 3-1/2 in deep electrical box
Wall plates	1-gang wall plate: QWP1G-01-WH 2-gang wall plate: QWP2G-01-WH

**Compatible Products**

Companion Switch	QCS-01
------------------	--------

**LEGAL**

Resistive: 15 A@120/277 V

Incandescent: 960 W@120 V/1385 W@277 V

Motor: 1/2 HP@120/277 V

Operating ambient temperature 0 to 40 °C

Method of mounting included: Independently mounted (vertical position only)

Operating control, Type 1.C action Pollution Degree 2

Rated Impulse Voltage 4000 V Software Class A

NEMA type 1 enclosure

FOR INDOOR USE ONLY