



The **QoraLux Triple Output DIN Driver** is a panelized DIN rail, an all-in-one solution for intelligent power distribution featuring three outputs that power and control multiple fixtures simultaneously.

KEY BENEFITS

- Seamless integration with SAVI Creator for configuration and stats
- Includes built-in power supply with standard NEC power plug and dimmable Class 2 outputs for simplified wiring
- Each output is individually configurable and addressable on any preferred channel, boasting 288 W max power capacity at 96 W per output
- Dynamic solution ideal for installations in older buildings without a dedicated AV room or projects lacking extra rack space
- Flexible options with wall mounting or 35 mm DIN rail system
- Compounded energy-efficient savings with low-voltage power distribution
- Compatible with all QoraLux fixtures

SPECIFICATIONS

Control, Monitoring, and Network	
Control modes	DMX 512 <ul style="list-style-type: none"> • Auto: pre-programs accessible via display • Manual: fixture intensity adjustable via display settings
DMX modes	5 modes: <ul style="list-style-type: none"> • 1 channel mode: dimmer • 2 channel mode: warm white, cool white • 3 channel mode: R, G, B • 4 channel mode: R, G, B, W • 7 channel mode: dimmer, R, G, B, W, strobe, macro
Operating mode	DMX 512, standalone
Standards and protocols	DMX 512

Electrical

Connection	4-pole screw terminal V-V+
Drive method	Constant voltage
Power input	24 V
Sensor bypass	12 V, drives all 512 channels to full when contact closure is present (emergency lighting applications)
Total max power	288 W

Inputs

Input voltage	24 VDC
---------------	--------

Outputs

Connector type	5-pole screw terminal and RJ45 output
Outputs	3 ports
Output voltage	0-24 VDC
Power per output	96 W

Mechanical/Environmental


Dimensions	6 1/8 in x 2 1/4 in x 3 1/2 in (HxWxD)
DMX Connection	3-position screw terminal and RJ45 in and out
Fastening system	DIN rail mount 35 mm (recommended)
IP rating	Indoor use only
Operating temperature	24 to 148 °F (-4 to 64 °C)
Weight	1.98 lb

Optional Accessories

Din Rail Mounts	QD3-DIN
-----------------	---------

Compatible Products*	
Accent 4"	QA4-10-01
Cove Strip	QCS-18-01
Flex Strip Horizontal	QFSH-94-01
Flex Strip Vertical	QFSV-94-01
Flex Strip Vertical Stealth	QFVS-94-01
QORALUX.One Pro	QLCP-01
Mini 3"	QM3-9-01
Pendant 15"	QP15-96-01
Pathway 4"	QP4-30-01
Pendant 6"	QP6-20-01
Recessed 4"	QR4-10-01
Recessed 6"	QR6-19-01
Recessed 8"	QR8-30-01
Sconce 4"	QS4-20-01

*Visit the [SAVI store](https://www.savicontrols.com) to view all of SAVI's branded products.

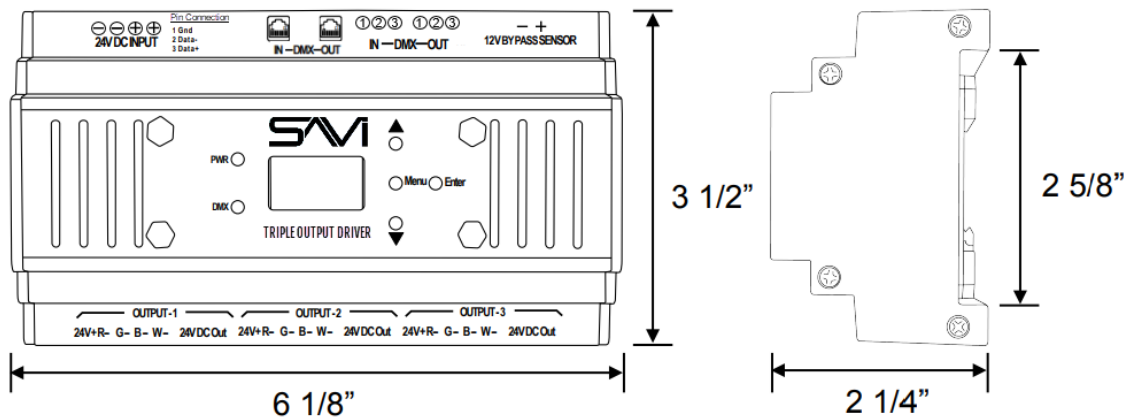

CONNECTIONS EXAMPLE

