



Ideal for both indoor and outdoor applications, **QoraLux Mini 3"** provides dynamic ambient and directional lighting for any commercial space.

KEY BENEFITS

- Simplified installation with Class 2 low-voltage wiring
- Create vibrant lighting scenes with RGB color mixing and 3267 K tunable white
- IP65-rated and suitable for interior or exterior installations
- Compounded energy-efficient savings with low-voltage power distribution
- Reduced failure rate with driverless fixtures
- Compatible with all QoraLux drivers
- 3.54 in with 9 W max power

SPECIFICATIONS

Control, Monitoring, and Network	
Control	DMX 512 (when using QoraLux driver)
DMX modes	4 channel mode: R, G, B, TW 7 channel mode: Dimmer, R, G, B, TW, strobe, macro


Lighting	
Color temperature	Tunable white, 3267 K
CRI (tunable white)	84.3
Each LED wattage	1.3 W
LED quantity	7
LED type	SMD 5050 R, G, B, TW
Lens angle	27°
Lumen	363 @full

Electrical	
Connection	5 conductor cable
Drive method	Constant voltage
Power input	24 VDC
Total max power	9 W


Mechanical/Environmental	
Cable length	30 in (QM3-9-01) 125 ft (QM3-9-01-125)
Dimensions	3.54 in x 3.54 in x 3.93 in (HxWxD)
Fastening system	Floor standing
Housing	Extruded aluminum
IP rating	IP65
Operating temperature	-22 to 122 °F (-30 to 50 °C)
Weight	1.05 lb

Compatible Products*	
Single Output Driver	QD1-96-01
Triple Output DIN Driver	QD3-288-01
Twenty-Four Output Driver	QD24-480-01
Quad Output Driver	QD4-384-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

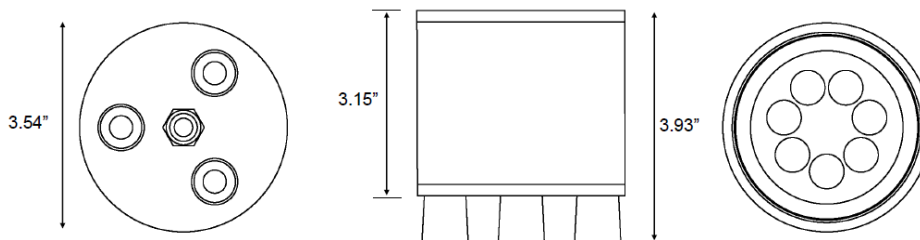

CONNECTIONS EXAMPLE

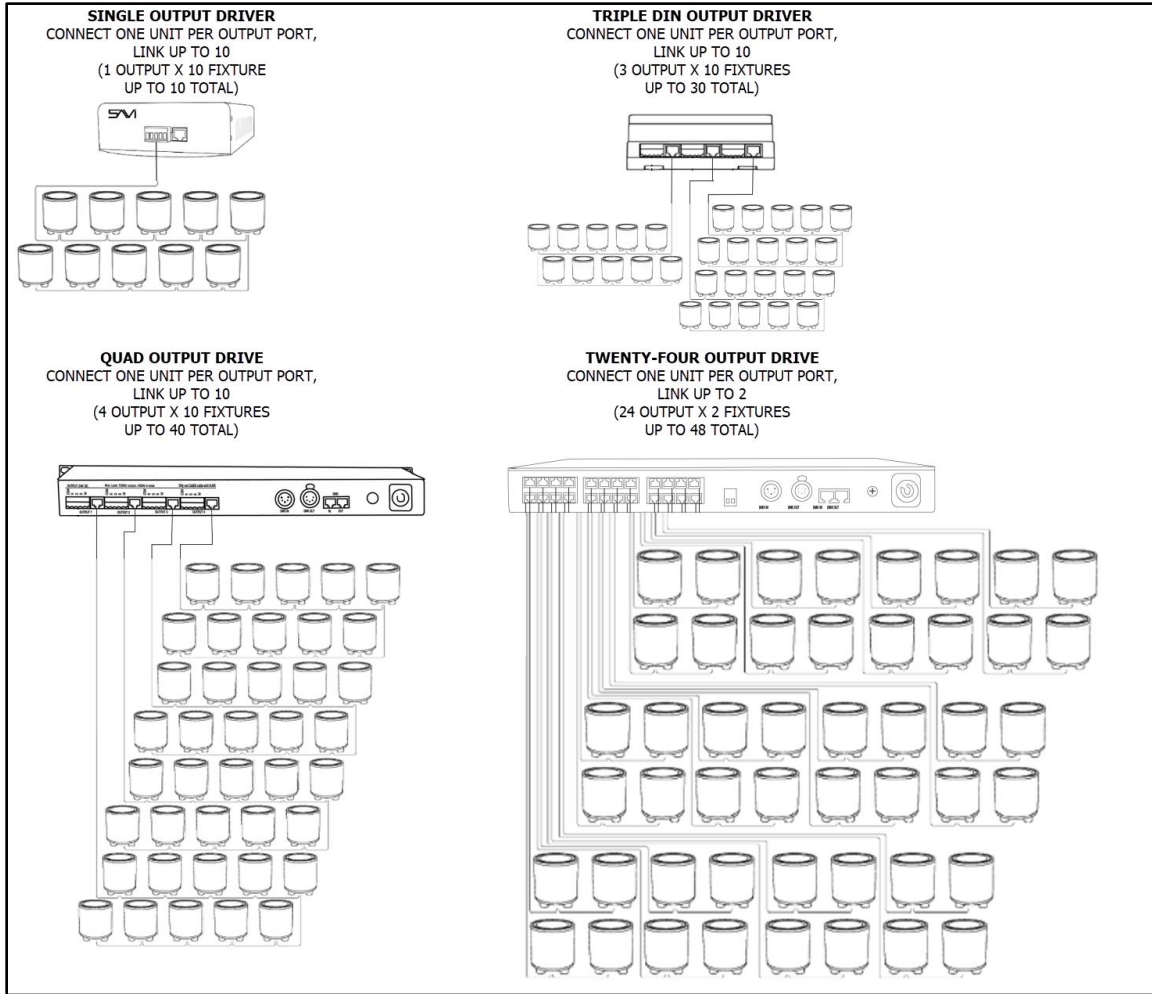

PHOTOMETRICS

