



Offering an elegant yet simplified approach to indoor lighting, **QoraLux Pendant 15"** features a combination of 2950 K tunable white and vivid RGB color mixing, achieving rich colors, ambient, or wide key lighting. With an adjustable 8' hanging length, Pendant 15" is ideal for a wide range of applications and ceiling heights.

KEY BENEFITS

- Simplified installation with Class 2 low-voltage wiring
- Create engaging lighting scenes with RGB color mixing and 2950 K tunable white
- Suitable for high or low ceilings with an 8' adjustable hanging length
- Reduced failure rate with driverless fixtures
- Compatible with all QoraLux drivers
- Max power of 96 W

SPECIFICATIONS

Control, Monitoring, and Network	
Control	DMX 512 (when using QoraLux driver)
DMX modes	4 channel mode: R, G, B, TW 7 channel mode: Dimmer, R, G, B, TW, strobe, macro

Lighting	
Color temperature	Tunable white, 2950 K
CRI (tunable white)	83
Each LED wattage	1.05 W
LED quantity	91
LED type	SMD 5050 R, G, B, TW
Lens angle	23°, with diffuser 41°
Lumen	5077 @full

Electrical

Connection	RJ45 in only
Drive method	Constant voltage
Power input	24 VDC
Total max power	96 W

Mechanical/Environmental

Cable length	Adjustable up to 8 ft
Dimensions	15.38 in x 17.82 in (LxH)
Fastening system	Mounting bracket
Housing	Steel
IP rating	IP55
Operating temperature	-22 to 122 °F (-30 to 50 °C)
Weight	14.5 lb


Included Accessories

Clear lens cover
Diffusion filter


Compatible Products*

Single Output Driver	QD1-96-01
Triple Output DIN Driver	QD3-288-01
Quad Output Driver	QD4-384-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

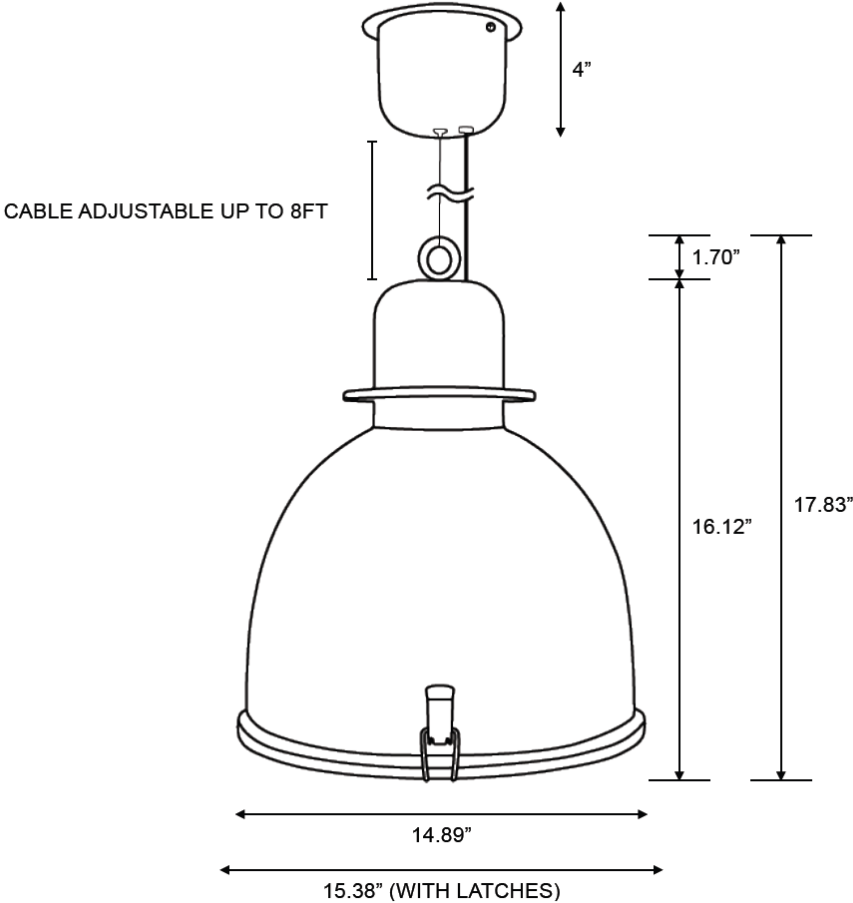

CONNECTIONS EXAMPLE

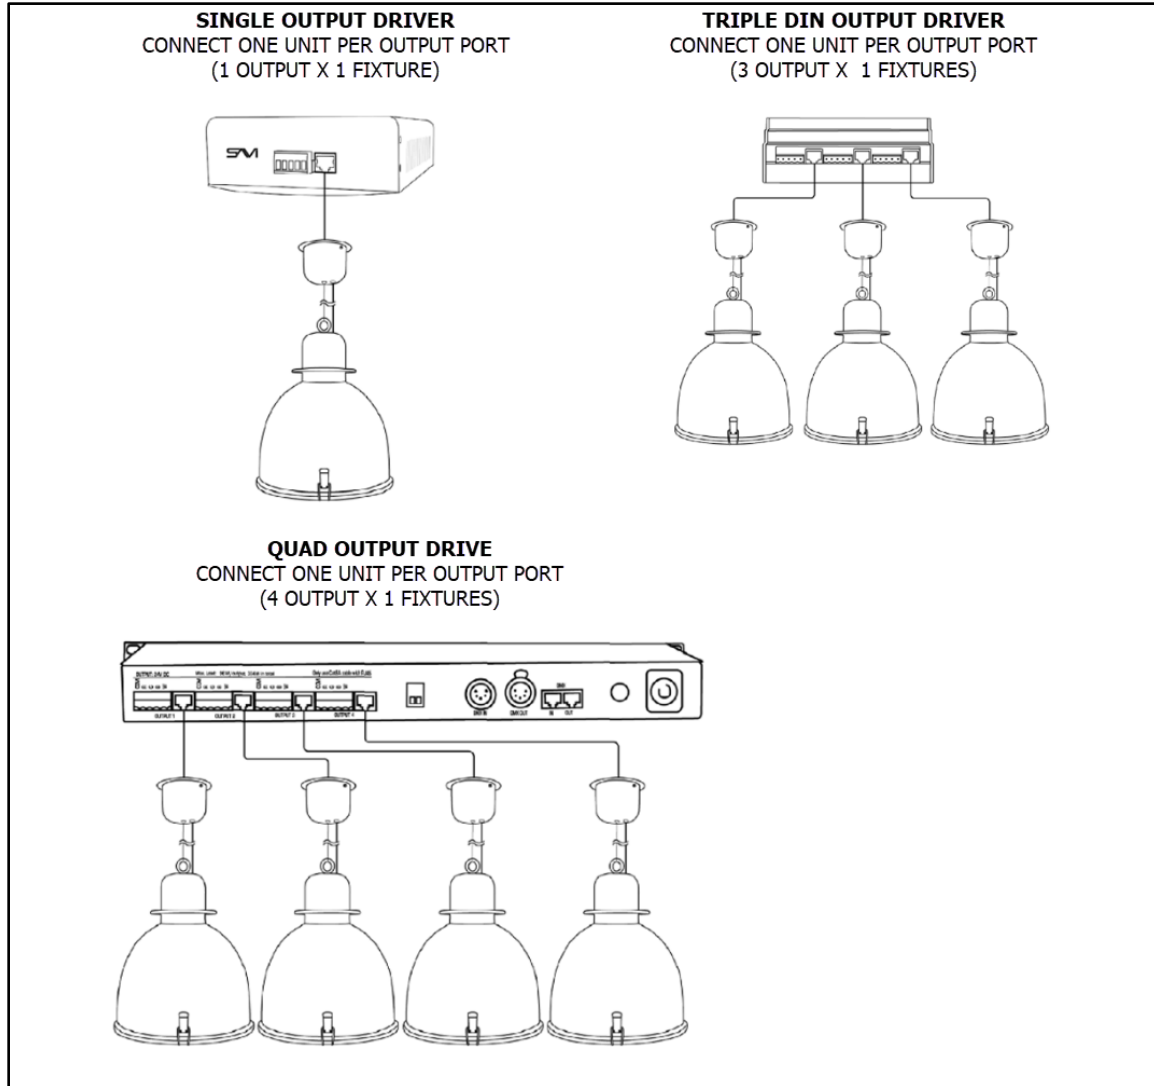

PHOTOMETRICS

