



A powerful brain sitting in a sleek 1U design, **QORALUX.One Pro** can control up to 1,024 lighting zones simultaneously over the network, making it the only lighting controller you'll ever need.

KEY BENEFITS

- Simplified installation with Class 2 wiring
- Fully embedded lighting control powerful enough for stadiums, houses of worship, museums, restaurants, and more
- 6-button front panel for easy troubleshooting and offline configuration
- End-user-enabled, simplified scene creation
- Sleek, 1U design allows for rack or wall mounting
- 8 built-in universes
- Compounded energy-efficient savings with low-voltage power distribution
- Compatible with all QoraLux drivers

SPECIFICATIONS

Control, Monitoring, and Network

Operating software	Enlighten (Memo Core Engine)
Supported operating systems	Ethernet port 10/100/1000 Mbps

Electrical

Connection	NEMA 5-15 panel receptacle
Fuse	F2 240 V (5 x 20 mm)
Power consumption	40 W @ 120 VAC

Inputs

Communication ports	Rear USB 3, front USB 3, screw terminal connection RS232 and RS485
HDMI	Single layer HD video 1920 x 1080 @ 30 FPS max, audio embedded

Outputs

Configurations	DMX 512
Connector type	DMX over RJ45 (8), HDMI monitor connection, HDMI output with audio embedded
Outputs	8 DMX over RJ45

Mechanical/Environmental

Cooling	Fan with heat sensor
Dimensions	19 in x 13.25 in x 1.75 in (HxWxD)
Fastening system	1 RU fixed rack-mount ears
IP rating	Indoor use only
Operating temperature	24 to 148 °F (-4 to 64 °C)
Weight	8.8 lb



Included Accessories

Bluetooth keyboard
Bluetooth mouse
MEMO core control
Removable rack ears
USB drive with software

Compatible Products *

Single Output Driver	QD1-96-01
Triple Output DIN Driver	QD3-288-01
Twenty-Four Output Driver	QD24-480-01
Quad Output Driver	QD4-384-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

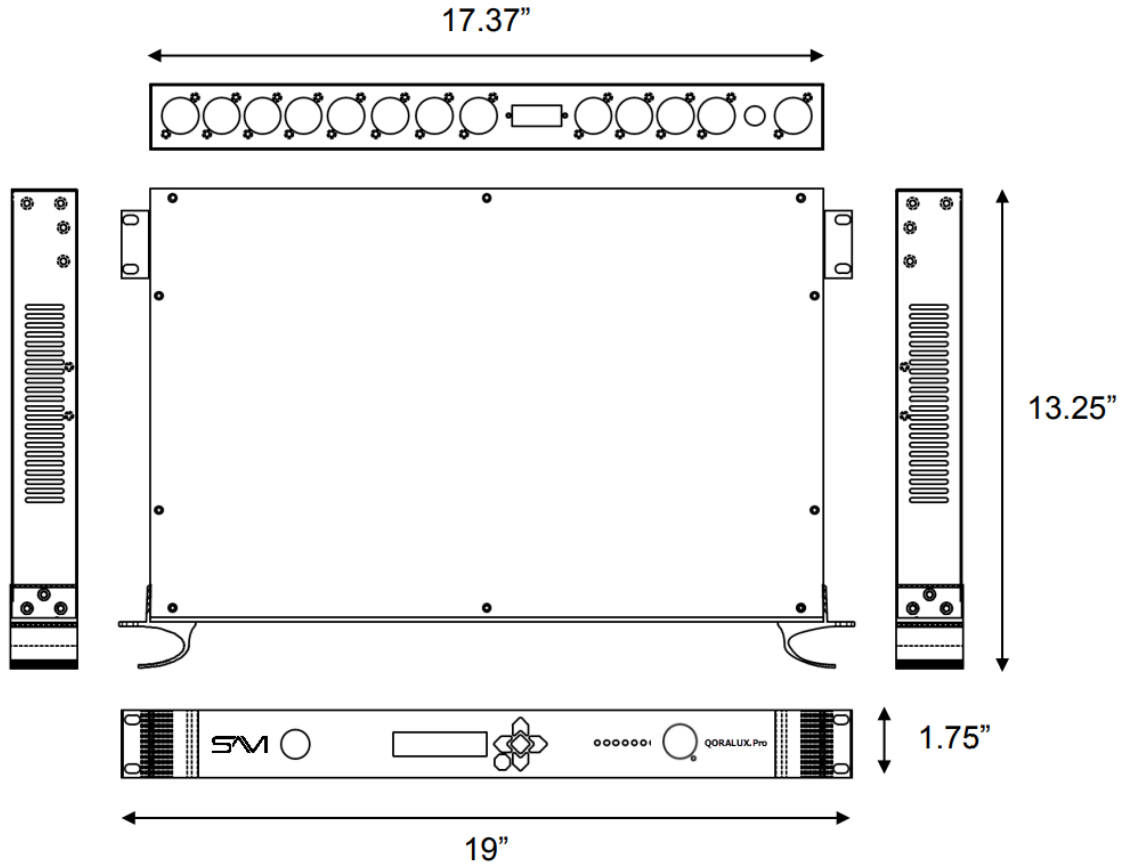

CONNECTIONS EXAMPLE:

