

QoraLux Pendant Bar 5' is a modern architectural fixture providing stunning downlighting with a minimal yet elegant profile. Offering both RGB color mixing and tunable white, Pendant Bar 5' enables integrators to design dynamic, energy-efficient lightscares tailored to any environment.

KEY BENEFITS

- Simplified installation with Class 2 wiring and voltage over 5 conductor 20 AWG cable
- IP65-rated and suitable for interior or most exterior installations
- Create vibrant lightscares with RGB color mixing and 3121 K warm white
- Compounded energy-efficient savings with low-voltage power distribution
- Reduced failure rate with driverless fixtures
- Compatible with QoraLux Drivers
- 5' with 48 W max power

SPECIFICATIONS

Control, Monitoring, and Network

Control	DMX 512 (when using QoraLux driver)
DMX modes	4 channel mode: R, G, B, TW 7 channel mode: Dimmer, R, G, B, TW, strobe, macro

Lighting

Color temperature	Tunable white, 3121 K
CRI (tunable white)	84
Each LED wattage	5.25 W
LED quantity	252
LED type	SMD 5050 R, G, B, WW
Lens angle	135°

Lighting

Lumen	1477
-------	------

Electrical

Connection	RJ45 Y in and out
Drive method	Constant voltage
Power input	24 VDC
Total max power	48 W

Mechanical/Environmental

Cable length	Adjustable up to 8 ft
Dimensions	5 ft x 2.75 in x 3 in (LxWxH)
Fastening system	Mounting bracket
Housing	Extruded Aluminum
IP rating	IP65
Operating temperature	-22 to 122 °F (-30 to 50 °C)
Weight	4.8 lb



Included Accessories

Universal electrical box mount (2)

Compatible Products*

Single Output Driver	QD1-96-01
Triple Output DIN Driver	QD3-288-01
Quad Output Driver	QD4-384-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

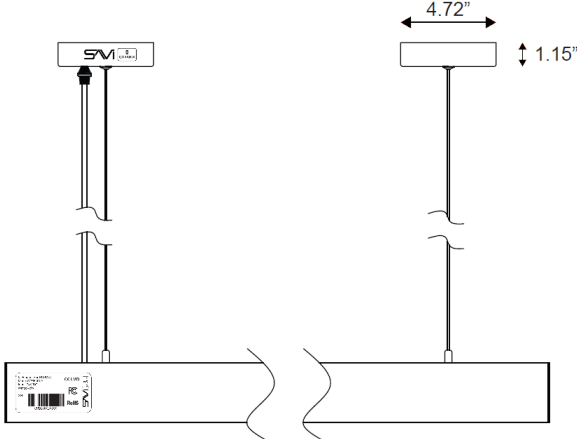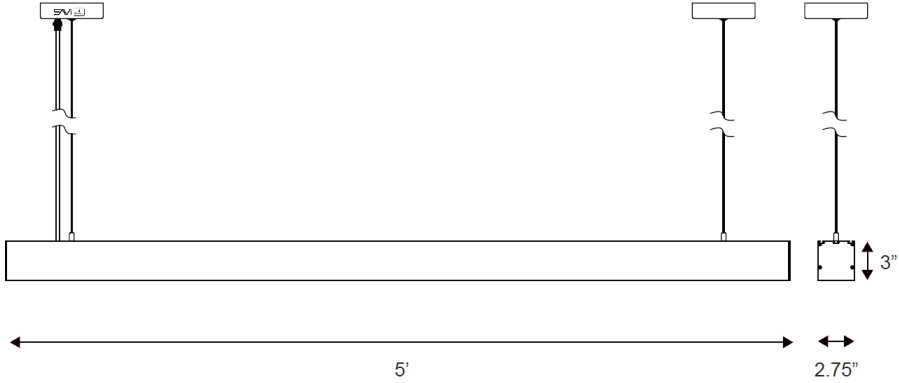

PHOTOMETRICS

