



QoraLux PoE 6-Button Keypad transforms your standard light switch into a custom, in-wall control hub for virtually any network-based device in your SAVI system.

KEY BENEFITS

- Optimized for new construction or retrofits, single-cable installation, remotely powered via PoE
- Integrated remote and manual control for lighting, audio, video, HVAC, and more without the need for additional lighting control solutions
- Fixture dimming profiles backed by rigorous compatibility testing
- Seven programmable RGB LED status indicators for real-time execution feedback
- Decora-style with convenient screw terminals, designed for easy installation in standard gang boxes
- Support adds on 3-way control
- Sleek, screwless face plates (sold separately)

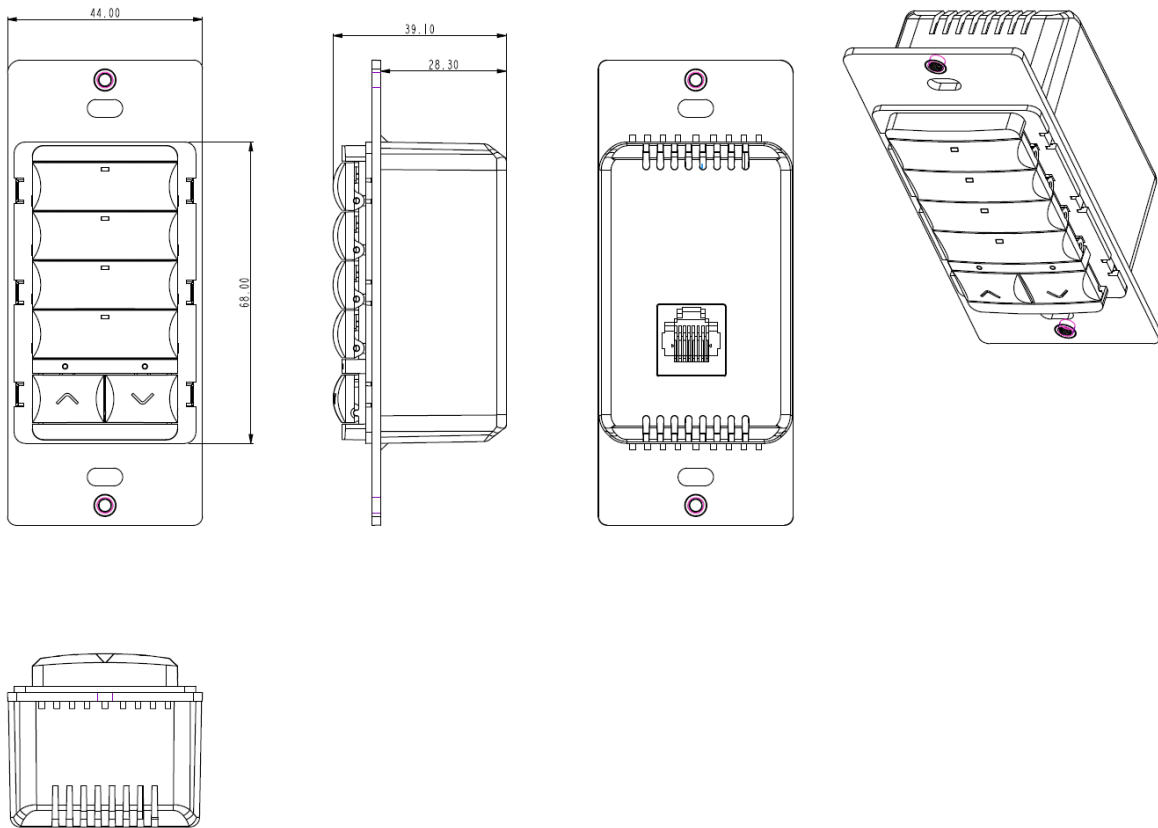
SPECIFICATIONS

Control, Monitoring, and Network	
Network connectivity	Wi-Fi and Bluetooth
Provisional application requirements	Android 5.0 or higher, iOS 10 or higher
Standards and protocols	Secured Wi-Fi Network (2.4 G only) IEEE 802.11 b/g/n
Supported operating systems	SAVI 3.4.1 and higher
Wireless type	2.4 GHz, 1T1R
Electrical	
Power input	POE 37-57 VDC Nominal 48 VDC

SPECIFICATIONS CONT.

Mechanical/Environmental	
Dimensions	4.125 in x 1.5 in x 1.25 in (HxWxD)
Operating temperature	32°-104°F (0-40°C)
Weight	.16 lb

Installation	
Mounting	1-gang mountable in a 3-1/2 in deep electrical box
Wall plates	1-gang wall plate: QWP1G-01-WH
	2-gang wall plate: QWP2G-01-WH

**LEGAL**

Input: 37-57VDC (nominal 48VDC)
Operating Ambient Temperature: 0-40°C
FOR INDOOR USE ONLY