



QoraLux Smart Outlet delivers the convenience of wireless control and the flexibility to remotely manage various plug-in devices from anywhere.

KEY BENEFITS

- Top outlet integrated remote and manual control for 120 V load types, including LEDs, incandescent, halogens, compact fluorescents, electronics, and small appliances
- Bottom outlet is always on for continuous use devices
- Front outlet button for local ON/OFF control
- Optimized for new construction or retrofits, 120 V applications
- Fast provisioning for quick integration
- Programmable LED status indicator for real-time execution feedback
- Eliminates the need to commission additional high-voltage control solutions
- Decora-style with convenient screw terminals, designed for easy installation in standard gang boxes
- Sleek, screwless face plates (sold separately)

SPECIFICATIONS

Control, Monitoring, and Network	
Network connectivity	Wi-Fi and Bluetooth
Provisional application requirements	Android 5.0 or higher, iOS 10 or higher
Standards and protocols	Secured Wi-Fi Network (2.4 G only) IEEE 802.11 b/g/n
Supported operating systems	SAVI 3.4.1 and higher
Wireless type	2.4 GHz, 1T1R

SPECIFICATIONS CONT.

Electrical

Max incandescent rating	1800 W
Max halogen rating	1800 W
Max motor rating	1/2 HP
Max resistive rating	1800 W
Power input	125 VAC/60 Hz

Mechanical/Environmental

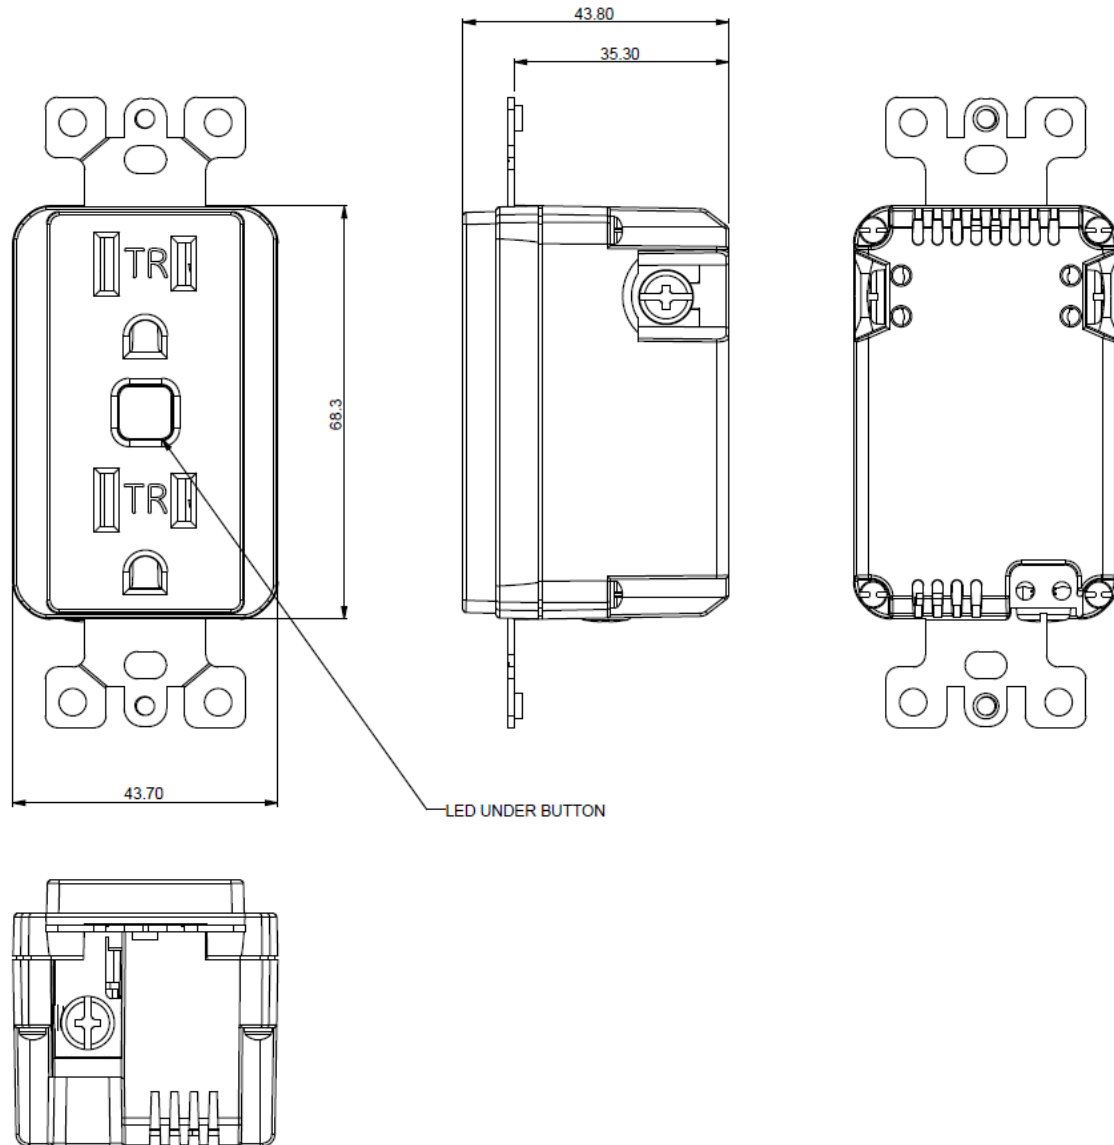
Dimensions	4.125 in x 1.5 in x 1.25 in (HxWxD)
Operating ambient temperature	32°-104°F (0-40°C)
Weight	.16 lb

Installation

Mounting	1-gang mountable in a 3-1/2 in deep electrical box
Wall plates	1-gang wall plate: QWP1G-01-WH 2-gang wall plate: QWP2G-01-WH

Compatible Products

Companion Switch	QCS-01
------------------	--------

**LEGAL**

Resistive/Incandescent/Halogen: 15A (1800W)

Motor: 1/2 HP

Operating Ambient Temperature: 0-40C

FOR INDOOR USE ONLY