



The **QoraLux Recessed 4"** offers energy-efficient downlighting, illuminating commercial offices, hotels, and more with bright light, tunable white, and vibrant RGB color mixing.

KEY BENEFITS

- Simplified installation with Class 2 low-voltage wiring
- Create engaging lighting scenes with RGB color mixing and 3047 K tunable white
- Compounded energy-efficient savings with low-voltage power distribution
- Reduced failure rate with driverless fixtures
- Compatible with all QoraLux drivers
- 4.75 in with 10 W max power

SPECIFICATIONS

Control, Monitoring, and Network	
Control	DMX 512 (when using QoraLux driver)
DMX modes	4 channel mode: R, G, B, TW 7 channel mode: Dimmer, R, G, B, TW, strobe, macro


Lighting	
Color temperature	Tunable white, 3047 K
CRI (tunable white)	83
Each LED wattage	1.4 W
LED quantity	7
Lens angle	37°, with diffuser 53°
LED type	SMD 5050 R, G, B, TW
Lumen	437 @full

Electrical	
Connection	RJ45 in and out
Drive method	Constant voltage
Power input	24 VDC
Total max power	10 W


Mechanical/Environmental	
Cable length	1 ft 6 in
Dimensions	5.37 in x 2.20 in (LxH)
Fastening system	Spring-loaded recessed mount
Housing	Die-casted aluminum
IP rating	IP65
Operating temperature	-22 to 122 °F (-30 to 50 °C)
Weight	0.9 lb

Compatible Products*	
Single Output Driver	QD1-96-01
Triple Output DIN Driver	QD3-288-01
Twenty-Four Output Driver	QD24-480-01
Quad Output Driver	QD4-384-01

*Visit the [SAVI store](#) to view all of SAVI's branded products.

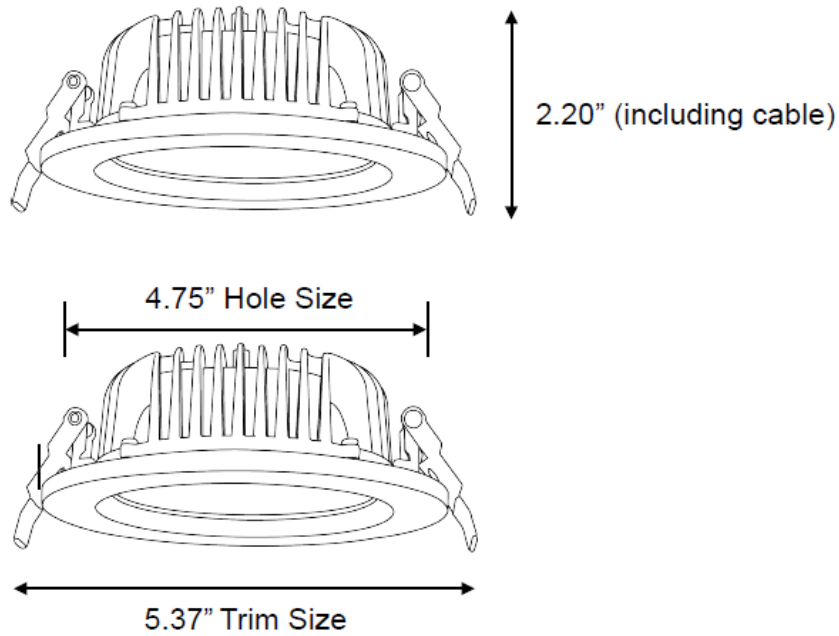

CONNECTIONS EXAMPLE

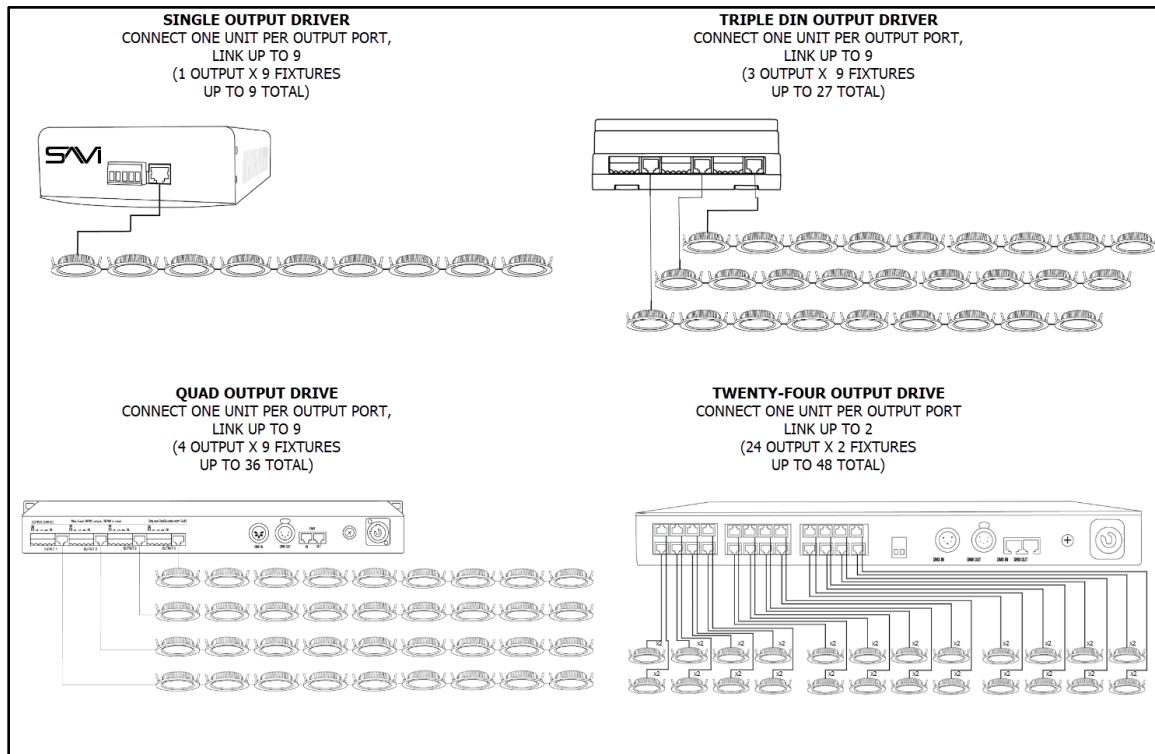

PHOTOMETRICS

